

RHINO INSULATED HEADER SYSTEM

THE MOST ADVANCED HEADER SOLUTION




The **Net Zero** Solution
for **Fully Insulated** Lintel Openings



UNIT	HEIGHT	HEADER LENGTH	ROUGH OPENINGS
SH3	5 1/4"	39"	up to 36"
SH4	5 1/4"	51"	up to 48"
SH5	5 1/4"	63"	up to 60"
SH6	7 1/4"	75"	up to 72"
SH8	7 1/4"	99"	up to 96"
SH10	7 1/4"	123"	up to 120"

Distributed by

MiTek[®]

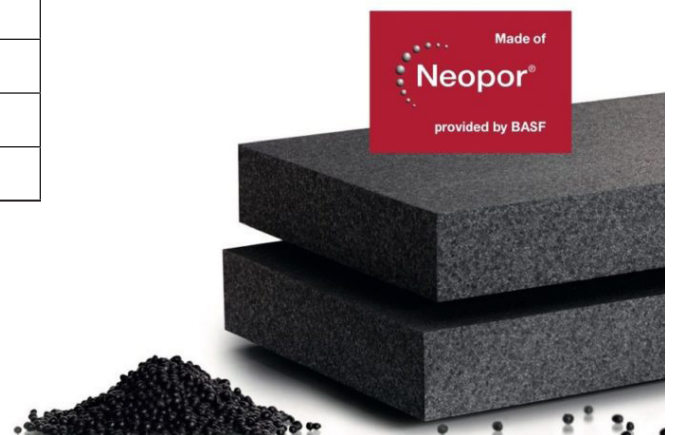

The Rhino header system is
the most advanced Header Solution available today
 for single family, multi-family and mid-rise construction.

Saves Hours of Labour

Pre-insulated and job-site ready, it eliminates the labour needed to cut, insulate and assemble headers onsite, saving hours of framers labour per home.



Cost-effective

Real savings over typical wood headers. Allows the use of larger, lower cost, standard-size windows. And for the homeowner: 12% reduction of annual energy costs. Eliminates over 350 cubic feet of thermal energy loss per home.



Greener

Zero onsite waste vs up to 20% for traditional wood framing. 100% recyclable, Rhino Headers exceed requirements of the U.S. Green Building Council LEED V4 Green Building Rating System. The only Passive House and Net Zero Header system.



RHINO INSULATED HEADER SYSTEM	MINIMUM HEADER CAVITY DEPTH	NOMINAL INSULATION THICKNESS	ACTUAL THERMAL SYSTEM VALUES	
Rsi	Inches	Inches	RSI	R
4.4	5.5	5	4.58	26
2.64	3.5	3	2.75	15.6



MiTek[®]

1-800-268-3434
MiTek.ca

