




The WT22B-HDG corrugated wall tie is designed to meet the prescriptive requirements of CAN/CSA-A370 for connecting a masonry veneer to a wood structural backing. The WT22B-HDG is hot-dip galvanized after being pre-bent and pre-punched for a #10 wood screw.

**Materials:** 22 gauge

**Finish:** Hot-dip galvanized

**Installation:**

- The opposite end must be bonded in the mortar joint of brick facade.
- Use a minimum #10 wood screw to fasten to the wood structural backing.
- Wood screw shall penetrate at least 38 mm (1-1/2") into the wood structural backing.
- Meets prescriptive requirements of CAN/CSA A370 for corrugated strip ties.

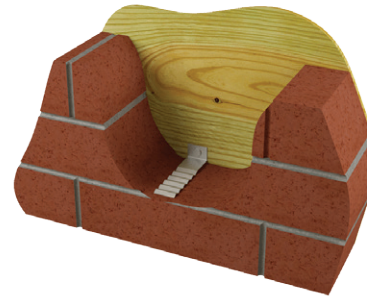

**Typical WT22B-HDG installation**



**WT22B-HDG**

MiTek Stock No.	Ref. No.	Steel Gauge	Dimensions (in)		Fastener Schedule		Ctn Qty
			W	L	Qty	Type	
WT22B-HDG	--	22	7/8	3-1/2	1	#10 HDG wood screw	500